


## MULTIEURAD MME 12 H (MSM 12 H)

Maximum heat input*	301,00	[kW]
Minimum gas inlet pressure - natural gas	20	[mbar]
Minimum gas inlet pressure - LPG	37	[mbar]
Maximum gas inlet pressure - natural gas	50	[mbar]
Maximum gas inlet pressure - LPG	50	[mbar]
Maximum natural gas consumption	28,68	[m <sup>3</sup> /h]
Maximum LPG consumption	20,96	[kg/h]
Radiant pipe diameter	100	[mm]
Single radiant tube heater dimensions (AxBxC)	11780x450x250	[mm]
Single radiant tube heater weight with aluminium reflector	74,3	[kg]
Single radiant tube heater weight with stainless steel reflector	90,7	[kg]
Air intake pipe diameter	100	[mm]
Exhaust pipe diameter	100	[mm]
Maximum electrical input	2,4	[kW]

\*H<sub>s</sub> according to EN 437

\*\*Available also in two-stages version

### DIMENSIONS

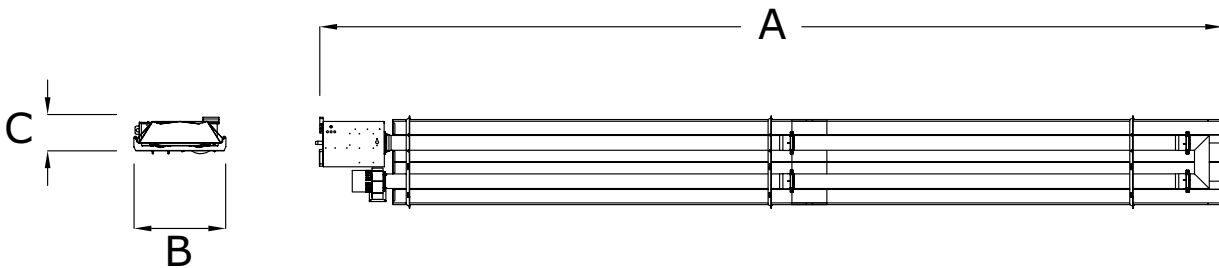

### Example with MSM units

