


MULTIEURAD MME 18 H (MSC 9 H)

Maximum heat input*	346,4	[kW]
Minimum gas inlet pressure - natural gas	20	[mbar]
Minimum gas inlet pressure - LPG	37	[mbar]
Maximum gas inlet pressure - natural gas	50	[mbar]
Maximum gas inlet pressure - LPG	50	[mbar]
Maximum natural gas consumption	33,04	[m ³ /h]
Maximum LPG consumption	24,16	[kg/h]
Radiant pipe diameter	100	[mm]
Single radiant tube heater dimensions (AxBxC)	9050x650x250	[mm]
Single radiant tube heater weight with aluminium reflector	97,4	[kg]
Single radiant tube heater weight with stainless steel reflector	114,2	[kg]
Air intake pipe diameter	100	[mm]
Exhaust pipe diameter	100	[mm]
Maximum electrical input	2,4	[kW]

*H_s according to EN 437

**Available also in two-stages version

DIMENSIONS

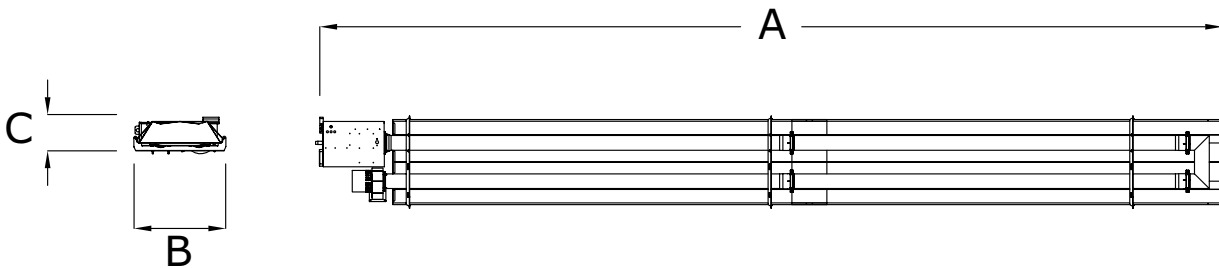

Example with MSM units

