

## EUTERM AVH 600

Length	<b>2000</b>	<b>4000</b>	<b>6000</b>	[mm]
Width	600	600	600	[mm]
Number of tubes	6	6	6	No.
Tubes diameter	22.0	22.0	22.0	[mm]
Thermal output with $\Delta t$ 40 °C		255		[W/m]
Thermal output with $\Delta t$ 60 °C		414		[W/m]
Thermal output with $\Delta t$ 80 °C		583		[W/m]
Weight without water	19.0	38.0	57.0	[kg]
Water content	3.6	7.2	10.8	[kg]

## EUTERM AVH 600 HEADERS

Header length	600	[mm]
Number of tubes	6	No.
Inlet/outlet connection	1" M	
Air vent/water discharge	3/8" F	

### STANDARD HEADER

Number of inlet/outlet tube connections	1	No.
Number of connections for venting emptying	2	No.
Weight without water	2.2	[kg]
Water content	1.3	[kg]

### BLIND HEADER


Number of inlet/outlet tube connections	-	No.
Number of connections for venting emptying	2	No.
Weight without water	2.0	[kg]
Water content	1.3	[kg]

### DIAPHRAGMED HEADER


Number of inlet/outlet tube connections	2	No.
Number of connections for venting emptying	4	No.
Weight without water	2.5	[kg]
Water content	1.3	[kg]




**DIMENSIONS**

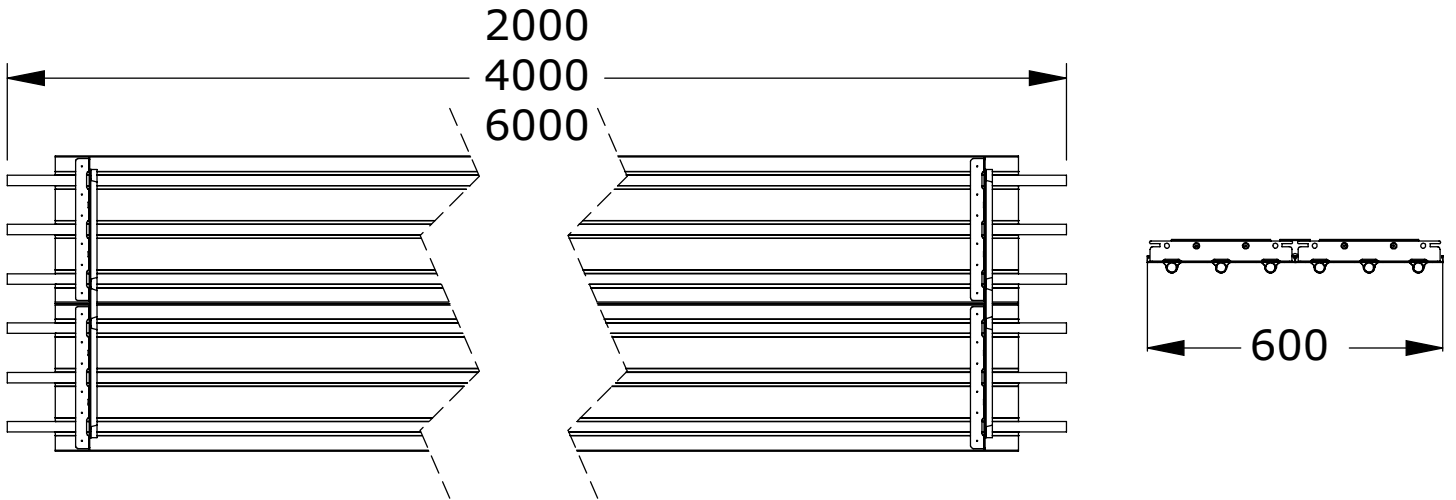

**Standard header**

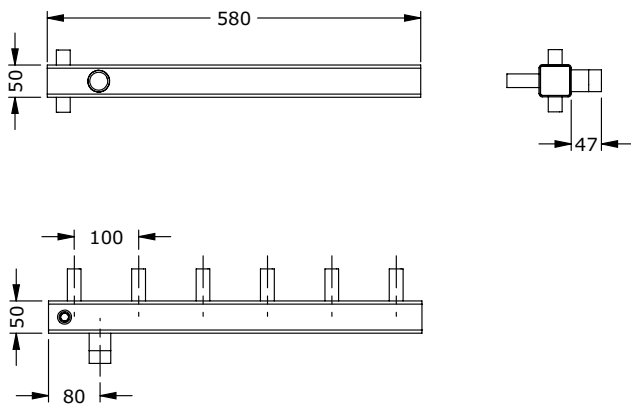

**Blind header**

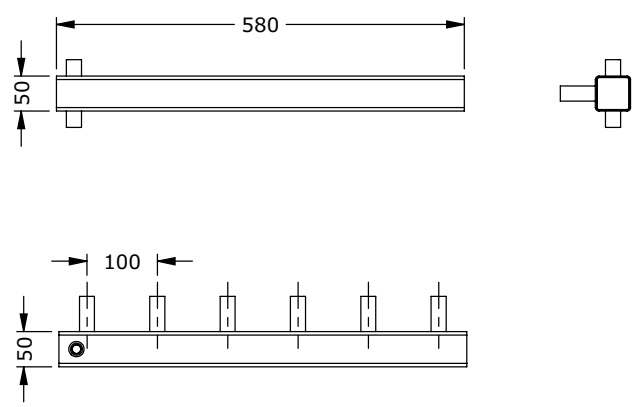

**Diaphragmed header**

